

Model 223

Submersible Sewage Pump

50 Hz

Features:

- Thermal overload protection motor and rugged cast iron motor housing for long life
- High efficient motor; oil-filled for enhanced heat dissipation
- Engineered thermoplastic and stainless steel components provide improved corrosion resistance
- Vent hole prevents air lock
- Non-clogging vortex impeller passes up to 50 mm (2") spherical solids
- Carrying handle for convenient pump placement
- Standard 10 m (33') cord
- Maximum operating water temperature 40 °C (104 °F)
- Switch on/off point: on: 450 mm (17-23/32"), off: 180 mm (7-3/32")

Applications:

- Wastewater removal for residential septic systems
- Factory wastewater removal
- Wastewater removal for livestock
- Wastewater removal containing solids
- General wastewater removal


100% factory tested




Trusted. Tested. Tough.®



ZT0577_Eb
0622
Supersedes
NEW

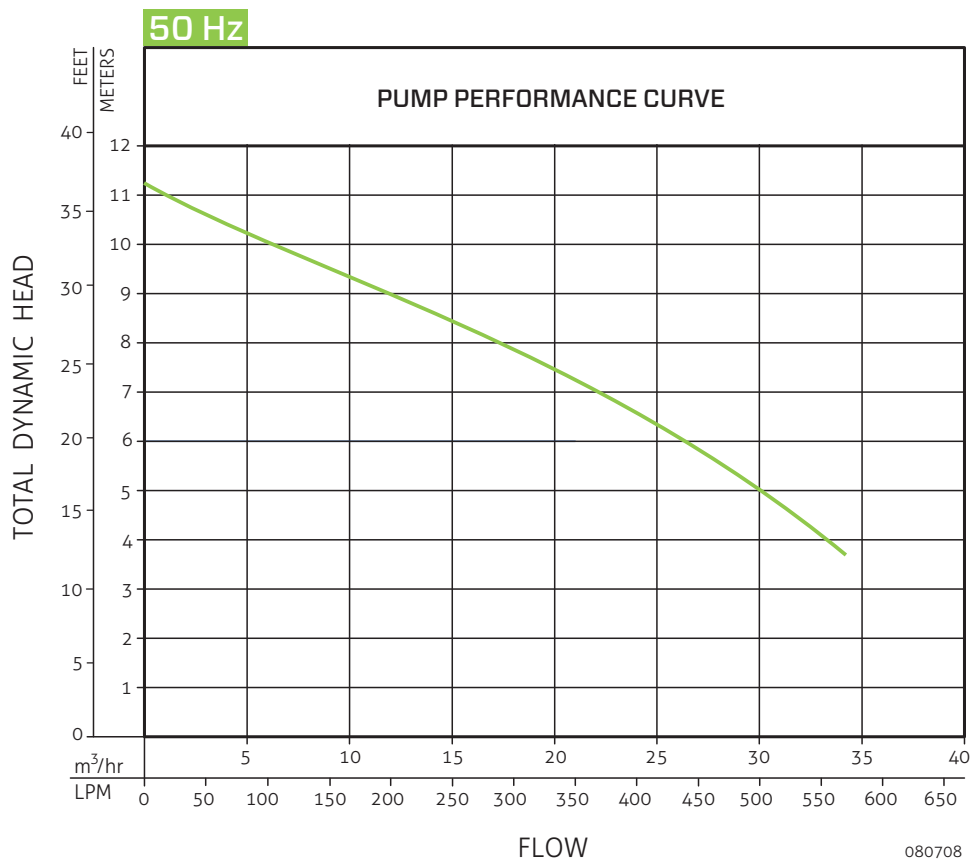

50 Hz								
Model	Mode	Volt (V)	Ph Ø	Amps (A)	Motor		Weight	
					kW (p1)	HP	kg	lbs
V223	Non-Auto	220-240	1	8.5	1.86	1	18.1	39.9
WU223	Auto-Tethered	220-240	1	8.5	1.86	1	18.1	39.9

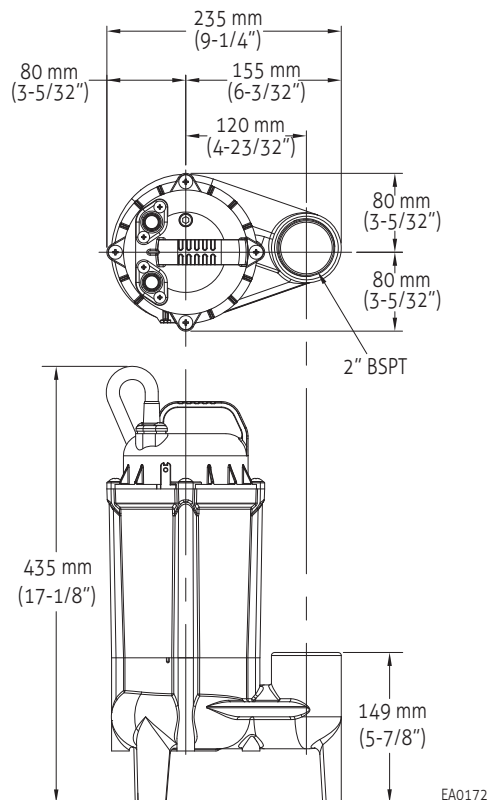

Product information presented here reflects conditions at time of publication.
Consult factory regarding discrepancies or inconsistencies.

© Copyright 2022 Zoeller® Co. All rights reserved.
www.zoellerpumps.com

